

KENT S P1

SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	15
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1410 / 1465 / 1565
LIGHT COLOUR	[K]	2700 / 3000 / 4000
CRI		>90
BEAM ANGLE	[°]	30 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	94

POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		-


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,62
GROSS WEIGHT	[kg]	0,65
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C






LIGHT DISTRIBUTION

30°

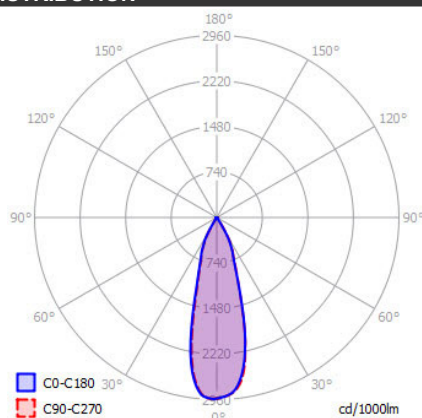


OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	10 / 18 / 38
SNOOT		BLACK
HONEY COMB LOUVER		BLACK
FILTER LENS		LINEAR DIFFUSION
FILTER LENS		PRISMATIC DIFFUSION




Colours




white

black

TRACK MOUNTING



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING